


```
/** ** Program to Implement Thread using Runnable Interface ** ** */

class A implements Runnable
{
    public void run()
    {
        for(int i=0; i<20; i++)
        {
            System.out.println(i);
        }
    }
}

class Run1
{
    public static void main(String args[])
    {
        A a1 = new A();
        Thread t = new Thread(a1);
        t.start();
    }
}
```

**Output:**

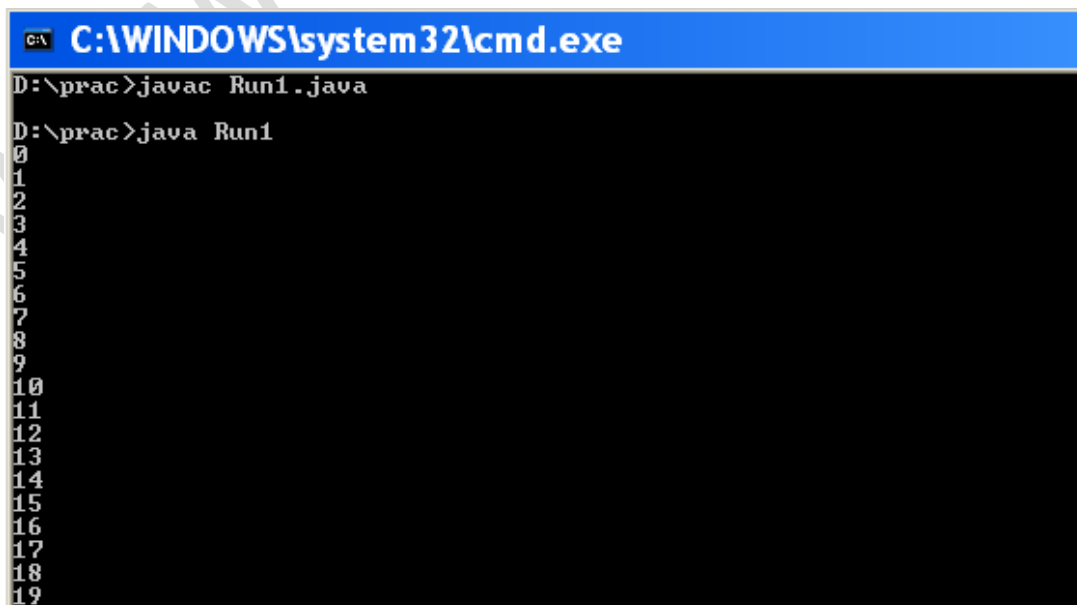

```
C:\WINDOWS\system32\cmd.exe
D:\prac>javac Run1.java
D:\prac>java Run1
0
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
```