


SYNCHRONOUS & ASYNCHRONOUS DATA TRANSFER

24-Nov-2010 www.eargprofes.com

Maninder Kaur
professormaninder@gmail.com

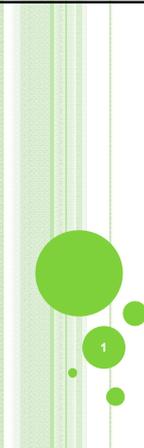

SYNCHRONOUS DATA TRANSFER

- In a digital system, the internal operations are synchronized by means of clock pulses supplied by a common pulse generator.
- In a computer, CPU and an I/O interface are designed independently of each other.
- If the registers in the interface share a common clock with the CPU registers, the data transfer between two units are said to be synchronous.

24-Nov-2010 www.eargprofes.com

2

ASYNCHRONOUS DATA TRANSFER

- In a computer system, CPU and an I/O interface are designed independently of each other.
- When internal timing in each unit is independent from the other and when registers in interface and registers of CPU uses its own private clock.
- In that case the two units are said to be asynchronous to each other. CPU and I/O device must coordinate for data transfers.

24-Nov-2010 www.eargprofes.com

3

METHODS USED IN ASYNCHRONOUS DATA TRANSFER


- **Strobe Control:** This is one way of transfer i.e. by means of strobe pulse supplied by one of the units to indicate to the other unit when the transfer has to occur.
- **Handshaking:** This method is used to accompany each data item being transferred with a control signal that indicates the presence of data in the bus. The unit receiving the data item responds with another control signal to acknowledge receipt of the data.

24-Nov-2010 www.eargprofes.com

4

STROBE CONTROL

- Strobe control method of data transfer uses a single control signal for each transfer. The strobe may be activated by either the source unit or the destination unit.
 - Source Initiated Strobe
 - Destination Initiated Strobe

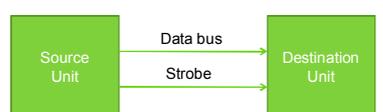

```

            graph LR
            SU[Source Unit] -- Data bus --> DU[Destination Unit]
            SU -- Strobe --> DU
            
```


24-Nov-2010 www.eargprofes.com

5

SOURCE INITIATED STROBE

- The *data bus* carries the binary information from source unit to the destination unit as shown below.
- The *strobe* is a single line that informs the destination unit when a valid data word is available in the bus.

Timing diagram

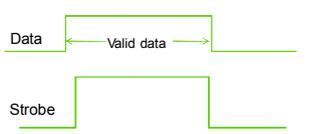

24-Nov-2010 www.eargprofes.com

6

SOURCE INITIATED STROBE

- The source unit first places the data on the bus.
- After a brief delay to ensure that the data settle to a steady value, the source activates the strobe pulse.
- The information of the data bus and the strobe signal remain in the active state for a sufficient time period to allow the destination unit to receive the data.
- The source removes the data from the bus for a brief period of time after it disables its strobe pulse.


24-Nov-2010 www.easynotes.com 7

DESTINATION INITIATED STROBE

- First, the destination unit activates the strobe pulse, informing the source to provide the data.
- The source unit responds by placing the requested binary information on the unit to accept it.
- The data must be valid and remain in the bus long enough for the destination unit to accept it.
- The falling edge of the strobe pulse can be used again to trigger a destination register.
- The destination unit then disables the strobe. The source removes the data from the bus after a predetermined time interval.

24-Nov-2010 www.easynotes.com 8

DESTINATION INITIATED STROBE

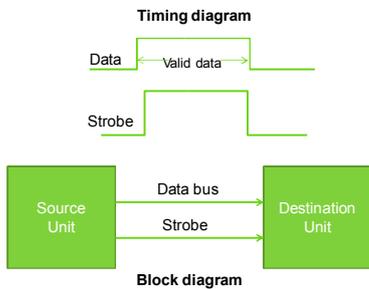

24-Nov-2010 www.easynotes.com 9

HANDSHAKING

- In case of source initiated data transfer under strobe control method, the source unit has no way of knowing whether destination unit has received the data or not.
- Similarly, destination initiated transfer has no method of knowing whether the source unit has placed the data on the data bus.
- Handshaking mechanism solves this problem by introducing a second control signal that provides a reply to the unit that initiate the transfer.
- There are two control lines in handshaking technique:
 - Source to destination unit
 - Destination to source unit


24-Nov-2010 www.easynotes.com 10

SOURCE INITIATED TRANSFER

- Handshaking signals are used to synchronize the bus activities.
- The two handshaking lines are *data valid*, which is generated by the source unit, and *data accepted*, generated by the destination unit.
- The timing diagram shows exchange of signals between two units.

24-Nov-2010 www.easynotes.com 11

SOURCE INITIATED TRANSFER

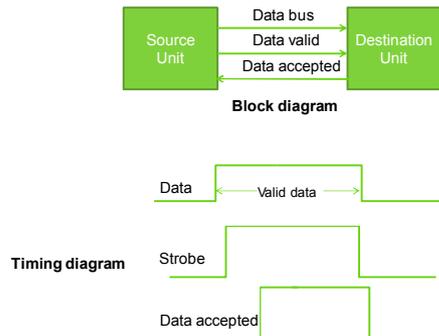

24-Nov-2010 www.easynotes.com 12

SOURCE INITIATED TRANSFER USING HANDSHAKING


o **The sequence of events:**

- The source unit initiates the transfer by placing the data on the bus and enabling its data valid signal.
- The data accepted signals is activated by the destination unit after it accepts the data from the bus.
- The source unit then disables its data valid signal, which invalidates the data on the bus.
- The destination unit the disables its data accepted signal and the system goes into its initial state.

13

24-Nov-2010 www.easynotes.com

SOURCE INITIATED TRANSFER USING HANDSHAKING

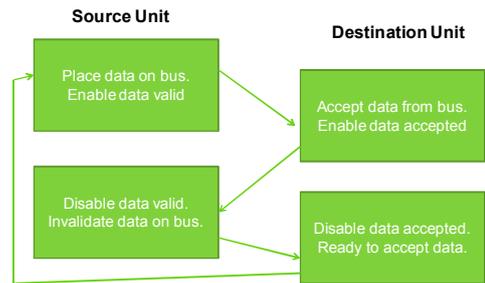

Sequence of events

14

24-Nov-2010 www.easynotes.com


DESTINATION INITIATED TRANSFER USING HANDSHAKING

- o In this case the name of the signal generated by the destination unit is *ready for data*.
- o The source unit does not place the data on the bus until it receives the *ready for data* signal from the destination unit.
- o The handshaking procedure follows the same pattern as in source initiated case. The sequence of events in both the cases is almost same except the *ready for signal* has been converted from *data accepted* in case of source initiated.


15

24-Nov-2010 www.easynotes.com

DESTINATION INITIATED TRANSFER

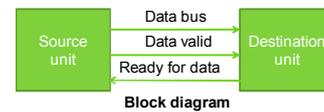

Block diagram

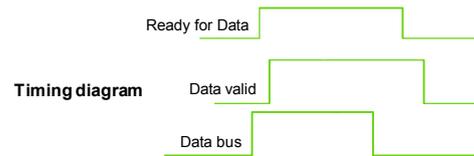

Timing diagram


16

24-Nov-2010 www.easynotes.com

DESTINATION INITIATED TRANSFER USING HANDSHAKING

Source Unit

Destination Unit

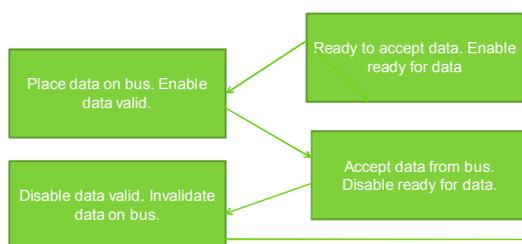

17

24-Nov-2010 www.easynotes.com

THANKS A LOT

18

24-Nov-2010 www.easynotes.com